

FLOOR PROFILES




INNOVATIVE SOLUTIONS FOR CERAMIC AND STONE TILE

FINISHING, EDGE PROTECTION, AND TRANSITIONS

Because ceramic and stone tiles are inherently brittle, their exposed edges can chip and crack if left unprotected. Transitions between floor surfaces and at thresholds are particularly vulnerable to damage. Schluter-Systems offers a variety of profiles to provide edge protection and transitioning at thresholds and between adjacent surfaces, resulting in durable, maintenance-free tiled coverings. The profiles can be grouped into two categories: transitions between same-height surfaces and transitions between different-height surfaces

Application and Function

Same-height Transitions

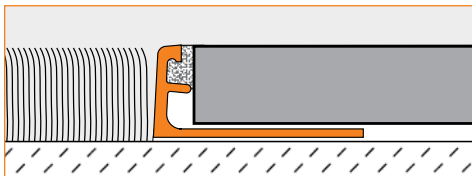

1.1 Schluter®-SCHIENE is designed to provide edging for tile coverings. Typical applications include edge protection where tile is bordered by carpet, at expansion joints, or as a decorative edging for stairs. SCHIENE is available in stainless steel, solid brass, aluminum, color-coated aluminum, textured color-coated aluminum, and anodized aluminum. The profile features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile, and an 87° sloped vertical wall section that transfers point loads to the substrate and surface covering while protecting tile edges from damage. SCHIENE, in solid brass, aluminum, color-coated aluminum, textured color-coated aluminum, and anodized aluminum, features a 5° sloped top flange and fillet at the anchoring leg/vertical section interface to enhance edge



1.1 Schluter®-SCHIENE




1.6 Schluter®-DECO




1.3 Schluter®-RENO-T


protection by reducing stresses on the tile, and, in sizes greater than 1/4" (6 mm), features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile. The anchoring leg of SCHIENE, in all materials, is available with a special radius perforation "R" so that the profile can be used to form curves.

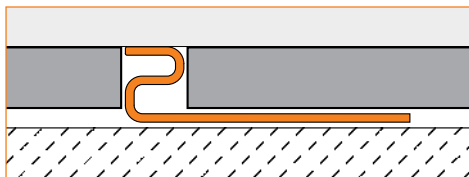


1.6 Schluter®-DECO is designed to provide decorative lines within tile coverings and edge protection at transitions from tile coverings to other same-height surface coverings, such as wood or carpet. The profile is available

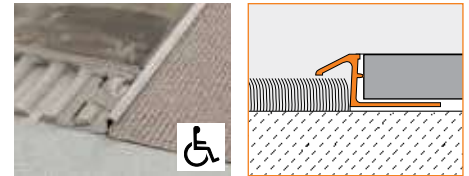


1.4 Schluter®-RENO-TK

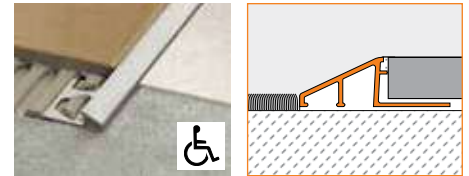

1.2 Schluter®-RENO-U

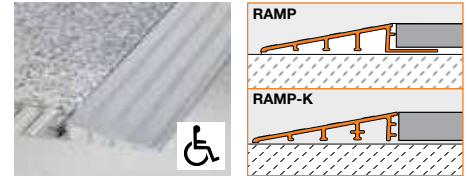


1.8 Schluter®-RENO-RAMP/-K

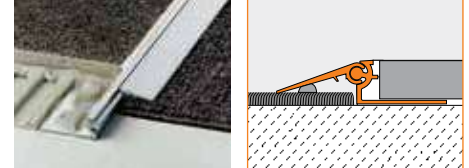


1.7 Schluter®-RENO-V

in stainless steel, solid brass, chrome-plated solid brass, and anodized aluminum. DECO features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile, and a 1/4" (6 mm)-wide visible surface that meets the high aesthetic requirements of showrooms, lobbies, galleries, exhibition booths, etc. The anchoring leg of DECO, in solid brass, chrome-plated solid brass, and anodized aluminum, is available with a special radius perforation "R" so that the profile can be used to form curves. DECO in chrome-plated brass requires a relatively large bending radius.

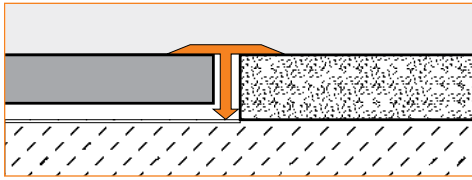


1.3 Schluter®-RENO-T is designed to provide transitions between existing same-height, hard-surface floor coverings (e.g., ceramic tile or natural stone, parquet flooring, concrete pavers, laminate, etc.), primarily in retrofit applications. The profile is available in stainless steel, solid brass, and anodized aluminum. RENO-T is installed within the existing joint cavity and overlaps adjoining surface materials, thus preventing edges from becoming damaged when subjected to mechanical stress. RENO-T, in brass and anodized aluminum size 9/14, is flexible in the lateral direction and can be used in curved applications.

Different-height Transitions

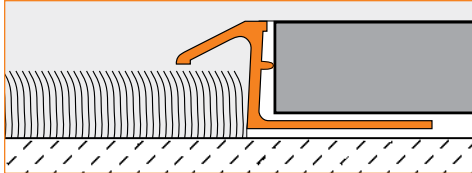



1.4 Schluter®-RENO-TK is designed to provide a smooth transition from tile coverings to floor coverings at lower elevations, typically carpet. The profile is available in stainless steel, solid brass, and anodized aluminum. RENO-TK features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile, and a sloped surface to eliminate trip hazards and protect tile edges. The 1/4" (6 mm) channel beneath the sloped flange of the profile hides and protects the cut edge of lower adjoining surface coverings. All sizes of the RENO-TK are compliant with the Americans with Disabilities Act (ADA). RENO-TK, in anodized aluminum, features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile. The anchoring leg of RENO-TK, in solid brass and anodized aluminum, sizes 60 to 100, is available with a special radius perforation "R" so that the profile can be used to form curves.

1.2 Schluter®-RENO-U is designed to

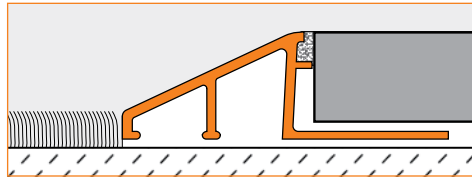

provide a smooth transition between tile coverings and floor coverings at lower elevations or finished concrete. The profile is available in stainless steel, solid brass, and anodized aluminum. RENO-U features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile, and a sloped surface (approximately 25°) that eliminates trip hazards and protects tile edges. The leading edge of the profile abuts the lower surface covering, typically VCT. RENO-U, in aluminum, features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile. In installations where the leading edge abuts a lower surface covering, all sizes of RENO-U, except the 3/4" (20 mm) and 11/16" (17.5 mm), are compliant with the Americans with Disabilities Act (ADA). In installations where the leading edge rests on top of the lower floor covering (e.g., finished concrete), the 3/4" (20 mm), 11/16" (17.5 mm), and 9/16" (15 mm) sizes are not ADA-compliant.

Note: When using Schluter® uncoupling membranes with RENO-U profiles, factor in the thickness of the membrane over the anchoring leg when selecting the profile height.

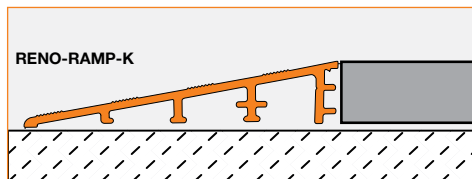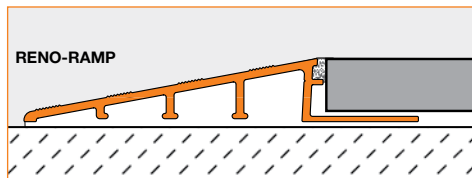


1.8 Schluter®-RENO-RAMP is designed to provide a smooth transition between tile coverings and floor coverings at lower elevations or finished concrete, particularly in commercial applications where wheel carts are used (e.g., bakeries, hospitals, etc.). The profile is available in anodized aluminum. RENO-RAMP features a trapezoid-perforated anchoring leg, which is secured in the

mortar bond coat beneath the tile, and a sloped transition surface that terminates at the height of the tile edge. The profile protects tile edges and provides a sloped surface to eliminate trip hazards and allow easy access for wheel carts. RENO-RAMP features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.

Note: When using Schluter® uncoupling membranes with RENO-RAMP profiles, factor in the thickness of the membrane over the anchoring leg when selecting the profile height.

Schluter®-RENO-RAMP-K is a variant of the profile without an anchoring leg. RENO-RAMP-K is installed adjacent to existing floor coverings, e.g., retrofitting between existing floor coverings and bare concrete without having to disturb the existing flooring. All sizes of RENO-RAMP, except sizes 9/16" (15 mm) and 3/4" (20 mm), are compliant with the Americans with Disabilities Act (ADA).

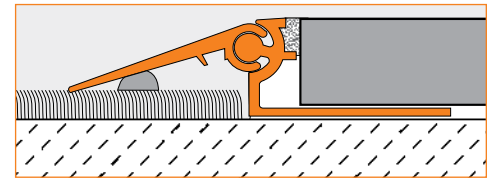

1.7 Schluter®-RENO-V is designed to provide a smooth transition between tile coverings and floor coverings at lower elevations. The profile is available in anodized aluminum. RENO-V features a trapezoid-perforated anchoring leg, which is secured in the mortar bond coat beneath the tile, and a movable transition arm that allows the profile to adjust to the height of the adjacent floor covering via a ball-and-socket joint. The profile protects tile edges and provides a sloped surface to eliminate trip hazards. RENO-V features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile. RENO-V is also suitable for heavy-duty applications (e.g., entrances to garages or loading docks). In such cases, the adjustable arm is backfilled with mortar.

Material Properties and Areas of Application

Schluter edge-protection and transition profiles are resistant to most chemicals encountered in tiled environments. In special cases, the suitability of a proposed type of profile

must be verified based on the anticipated chemical, mechanical, and/or other stresses. Exceptions and special considerations are listed below:

Stainless steel profiles are roll-formed, resulting in a slightly different contour from those made of extruded brass or aluminum. Stainless steel can sustain high mechanical stresses and is particularly well suited for applications requiring resistance against chemicals and acids; for example in the food industry, breweries, dairies, commercial kitchens, and hospitals, as well as in residential applications. Typically, the profiles are formed using stainless steel 304 (1.4301 = V2A). For more severe chemical exposure, such as de-icing salts and chemicals used in swimming pools, we recommend the use of stainless steel 316 L (1.4404 = V4A), which offers even higher corrosion resistance than the 304. Even stainless steel cannot withstand all chemical exposures, such as hydrochloric acid, hydrofluoric acid or certain chlorine, chloride, and brine concentrations. Both stainless steel 304 and stainless steel 316 L are approved for use in exterior applications. Stainless steel 304 is not as corrosion resistant as 316 L; however, profiles in stainless steel 304 are acceptable for exterior use as long as the intended area is not susceptible to de-icing salts, chlorine, or saltwater.

Chrome-plated solid brass is ideal for matching chrome fixtures. Surfaces must be protected against abrasion or scratching.

Solid brass can sustain high mechanical stresses, as well as most chemicals commonly encountered in tiled environments. Solid brass that is exposed to air will oxidize, resulting in a natural patina. If exposed to moisture or aggressive substances, heavy oxidation and spotting may occur.

Aluminum profiles must be tested to verify their suitability if chemical stresses are anticipated. Cementitious materials, in conjunction with moisture, become alkaline. Since aluminum is sensitive to alkaline substances, exposure to the alkali (depending on the concentration and duration of exposure) may result in corrosion (aluminum hydroxide formation). Therefore, it is important to remove mortar or grout residue from visible surfaces. In addition, ensure that the profile is solidly embedded in the setting material and that all cavities are filled to prevent the collection of alkaline water.

Color-coated aluminum and textured color-coated aluminum are pretreated aluminum that is color-coated with a polyester powder coat. The coating is color-stable, UV-resistant, and suitable for exterior use. Protect the profile against abrasion or scratching.

Anodized aluminum profiles feature an anodized layer that retains a uniform appearance during normal use, but is not color-stable in exterior applications. The surface is susceptible to scratching and wear and may be damaged by grout or setting material. Therefore, these materials must be removed immediately. Otherwise, the description regarding aluminum applies.

Due to variations in raw materials and manufacturing, the exact color, shade, and/or texture of individual profiles may vary. The customer must inspect the products upon delivery and notify Schluter in writing of any physical damage to the products or nonconformity with the purchase order or invoice.

Cutting Profiles

Observe all safety instructions and standards as directed by the cutting tool manufacturer, including protective eyewear, hearing protection, and gloves.

Always measure carefully and dry fit the profiles, corners, and connectors to ensure proper fit and alignment prior to setting tile.

Aluminum profiles may be cut using any of the following options:

- **Hacksaw** with a bimetal blade and the highest teeth per inch (TPI) available.
- **Variable-speed angle grinder** set to the lowest speed using the Schluter®-PROCUT-TSM cutting wheel.
- **Chop saw or miter saw** with a non-ferrous blade.

Regardless of the cutting tool used, remove any burrs from the cut end of the profile with a file or similar before installation.

Stainless steel profiles may be cut using any of the following options:

- **Variable-speed angle grinder** set to the lowest speed using the Schluter®-PROCUT-TSM cutting wheel.
- **Band saw** with a metal cutting blade.

Regardless of the cutting tool used, remove any burrs from the cut end of the profile with a file or similar before installation.

Brass profiles may be cut using any of the following options:

- **Hacksaw** with a bimetal blade and the highest teeth per inch (TPI) available.
- **Chop saw or miter saw** with a non-ferrous blade.

Regardless of the cutting tool used, remove any burrs from the cut end of the profile with a file or similar before installation.

Installation

SCHIENE, DECO, RENO-TK, RENO-U, RENO-RAMP, and RENO-V

1. Select the profile according to tile thickness and format.

Note: When using Schluter® uncoupling membranes with RENO-U and RENO-RAMP profiles, factor in the thickness of the membrane over the anchoring leg when selecting the profile height.

2. Using a notched trowel, apply thin-set mortar to the area where the profile is to be placed.

For RENO-U and RENO-RAMP, fill the cavity beneath the sloped section of the profile with thin-set mortar. Follow this step when RENO-V is used in heavy-duty applications, as well.

3. Press the perforated anchoring leg of the profile into the mortar and align.
4. Trowel additional thin-set mortar over the perforated anchoring leg to ensure full coverage and support of the tile edges.
5. Solidly embed the tiles so that the tiled surface is flush with the top of the profile; the profile should not be higher than the tiled surface, but rather up to approx. 1/32" (1 mm) lower.
6. Set the tile to the integrated joint spacer, which ensures a uniform joint of 1/16" - 1/8" (1.5 - 3 mm). For DECO and stainless steel profiles, leave a space of approximately 1/16" - 1/8" (1.5 - 3 mm).
7. Fill the joint completely with grout or setting material.
8. Remove grout or mortar residue from the visible surface of the profile.

RENO-RAMP-K

1. Fill the cavity beneath the sloped section of the profile with thin-set mortar.
2. Using a notched trowel, apply thin-set mortar to the area where the profile is to be placed.
3. Press the profile into the mortar and abut to the adjacent floor covering. The profile should not be higher than the adjacent floor covering, but rather up to approx. 1/32" (1 mm) lower.
4. Fill the joint completely with grout or setting material.
5. Work with materials and tools that will not scratch or damage sensitive surfaces. Setting materials must be removed immediately.

RENO-T

1. Select the profile according to joint width, to ensure proper support of the lateral crosspiece.
2. The joint cavity must be at least 3/8" (9 mm) deep and free of debris. Substances that inhibit adhesion must be removed from the sides of the joint.
3. Fill the joint with elastomeric sealant such as Schluter®-KERDI-FIX or similar. Then insert the vertical leg of RENO-T in the joint so that the lateral crosspiece rests completely on the edges of the surface coverings.
4. Remove any excess sealant with a suitable cleaner.

care and are resistant to mold and fungi. Clean profiles periodically using pH neutral cleaning agents.

Stainless steel surfaces exposed to the environment or aggressive substances should be cleaned periodically using a pH neutral cleaner. Regular cleaning maintains the neat appearance of stainless steel and reduces the risk of corrosion. All cleaning agents must be free of hydrochloric acid, hydrofluoric acid, and chlorides. Stainless steel surfaces develop a sheen when treated with a chrome-polishing agent.

Oxidation films on exposed **solid brass** or **aluminum** can be removed by using a conventional polishing agent, but the film will form again.

In the case of **anodized aluminum**, **color-coated aluminum**, and **chrome-plated solid brass**, do not use abrasive cleaning agents.


Maintenance

Schluter® edge-protection and transition profiles require no special maintenance or


Product Item Numbers




Aluminum, Brass
3/32" - 3/16" (2 - 4.5 mm)





1/4" - 1/2" (6 - 12.5 mm)



17/32" - 1-3/16" (14 - 30 mm)



Stainless steel



This product is available in radius

| Schluter®-SCHIENE | | | | | |
|-------------------------------|-------------------------------------------|-------------------------------------------------------|--------------------|-----------------|------------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Stainless steel 304 (1.4301 = V2A) (E) | Brushed stainless steel 304 (1.4301 = V2A) (EB) | Solid brass (M) | Aluminum (A) | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. | Item No. | Item No. | Item No. | Item No. |
| 2 - 3/32 | E 20 | - | - | A 20 | AE 20 |
| 3 - 1/8 | E 30 | - | M 30 | A 30 | AE 30 |
| 4.5 - 3/16 | E 45 | - | M 45 | A 45 | AE 45 |
| 6 - 1/4 | E 60 | E 60 EB | M 60 | A 60 | AE 60 |
| 7 - 9/32 | E 70 | - | - | A 70 | AE 70 |
| 8 - 5/16 | E 80 | E 80 EB | M 80 | A 80 | AE 80 |
| 9 - 11/32 | E 90 | - | M 90 | A 90 | AE 90 |
| 10 - 3/8 | E 100 | E 100 EB | M 100 | A 100 | AE 100 |
| 11 - 7/16 | E 110 | E 110 EB | M 110 | A 110 | AE 110 |
| 12.5 - 1/2 | E 125 | E 125 EB | M 125 | A 125 | AE 125 |
| 14 - 17/32 | E 140 | - | - | A 140 | AE 140 |
| 15 - 9/16 | E 150 | - | M 150 | A 150 | AE 150 |
| 16 - 5/8 | E 160 | - | M 160 | A 160 | AE 160 |
| 17.5 - 11/16 | E 175 | - | M 175 | A 175 | AE 175 |
| 20 - 3/4 | E 200 | - | M 200 | A 200 | AE 200 |
| 21 - 13/16 | - | - | - | A 210 | AE 210 |
| 22.5 - 7/8 | E 225 | - | M 225 | A 225 | AE 225 |
| 25 - 1 | E 250 | - | M 250 | A 250 | AE 250 |
| 27.5 - 1-1/16 | - | - | - | A 275 | AE 275 |
| 30 - 1-3/16 | E 300 | - | M 300 | A 300 | AE 300 |

| 10-foot (3.05 m) SCHIENE Profiles – Stainless Steel | |
|-----------------------------------------------------|----------------------------------------|
| Length = 3.05 m - 10' | Stainless steel 304 (1.4301 = V2A) (E) |
| H = mm - in. | Profile |
| 8 - 5/16 | E 80 / 300 |
| 10 - 3/8 | E 100 / 300 |
| 12.5 - 1/2 | E 125 / 300 |



| Schluter®-SCHIENE | | | | |
|-------------------------------|--------------------------------------------|--------------------------------------------|----------------------------------------|--------------------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Polished chrome anodized aluminum (ACG) | Brushed chrome anodized aluminum (ACGB) | Satin nickel anodized aluminum (AT) | Polished nickel anodized aluminum (ATG) |
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 6 - 1/4 | A 60 ACG | A 60 ACGB | A 60 AT | A 60 ATG |
| 8 - 5/16 | A 80 ACG | A 80 ACGB | A 80 AT | A 80 ATG |
| 10 - 3/8 | A 100 ACG | A 100 ACGB | A 100 AT | A 100 ATG |
| 12.5 - 1/2 | A 125 ACG | A 125 ACGB | A 125 AT | A 125 ATG |

| Length = 2.5 m - 8' 2-1/2" | Brushed nickel anodized aluminum (ATGB) | Satin copper anodized aluminum (AK) | Polished copper anodized aluminum (AKG) | Brushed copper anodized aluminum (AKGB) |
|-------------------------------|--------------------------------------------|----------------------------------------|--------------------------------------------|--------------------------------------------|
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 6 - 1/4 | A 60 ATGB | A 60 AK | A 60 AKG | A 60 AKGB |
| 8 - 5/16 | A 80 ATGB | A 80 AK | A 80 AKG | A 80 AKGB |
| 10 - 3/8 | A 100 ATGB | A 100 AK | A 100 AKG | A 100 AKGB |
| 12.5 - 1/2 | A 125 ATGB | A 125 AK | A 125 AKG | A 125 AKGB |

| Length = 2.5 m - 8' 2-1/2" | Satin brass anodized aluminum (AM) | Polished brass anodized aluminum (AMG) | Brushed brass anodized aluminum (AMGB) | Brushed antique bronze anodized aluminum (ABGB) |
|-------------------------------|---------------------------------------|-------------------------------------------|-------------------------------------------|----------------------------------------------------|
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 6 - 1/4 | A 60 AM | A 60 AMG | A 60 AMGB | A 60 ABGB |
| 8 - 5/16 | A 80 AM | A 80 AMG | A 80 AMGB | A 80 ABGB |
| 10 - 3/8 | A 100 AM | A 100 AMG | A 100 AMGB | A 100 ABGB |
| 12.5 - 1/2 | A 125 AM | A 125 AMG | A 125 AMGB | A 125 ABGB |

| 10-foot (3.05 m) SCHIENE Profiles – Anodized Aluminum | | | | |
|-------------------------------------------------------|---------------------------------|--------------------------------------------|----------------------------------------|----------------------------------------------------|
| Length = 3.05 m - 10' | Satin anodized aluminum (AE) | Polished chrome anodized aluminum (ACG) | Satin nickel anodized aluminum (AT) | Brushed antique bronze anodized aluminum (ABGB) |
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 8 - 5/16 | A 80 AE / 300 | A 80 ACG / 300 | A 80 AT / 300 | A 80 ABGB / 300 |
| 10 - 3/8 | A 100 AE / 300 | A 100 ACG / 300 | A 100 AT / 300 | A 100 ABGB / 300 |
| 12.5 - 1/2 | A 125 AE / 300 | A 125 ACG / 300 | A 125 AT / 300 | A 125 ABGB / 300 |

Schluter®-TRENDLINE Textured Color-coated Aluminum

| Schluter®-SCHIENE | |
|-------------------------------|-------------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Textured color-coated aluminum (TS) |
| H = mm - in. | Item No. |
| 6 - 1/4 | A 60 + color* |
| 8 - 5/16 | A 80 + color* |
| 10 - 3/8 | A 100 + color* |
| 11 - 7/16 | A 110 + color* |
| 12.5 - 1/2 | A 125 + color* |

***Color Codes**

| | | | | | | | | | |
|-------|--------|------------|-------|-------|--------------|--------|--------|------------------|-----------------|
| | | | | | | | | | |
| Ivory | Greige | Stone grey | Cream | Beige | Rustic brown | Bronze | Pewter | Light anthracite | Dark anthracite |

* To complete the item number, add the **color** code (e.g., A 60 **TSC**).

Matte White and Matte Black

| Schluter®-SCHIENE | |
|-------------------------------|-----------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Textured color-coated aluminum |
| H = mm - in. | Item No. |
| 3 - 1/8 | A 30 + color* |
| 4.5 - 3/16 | A 45 + color* |
| 6 - 1/4 | A 60 + color* |
| 8 - 5/16 | A 80 + color* |
| 10 - 3/8 | A 100 + color* |
| 11 - 7/16 | A 110 + color* |
| 12.5 - 1/2 | A 125 + color* |


***Color Codes**

| | |
|-------------|-------------|
| | |
| Matte white | Matte black |


* To complete the item number, add the **color** code (e.g., A 60 **MGS**).




Aluminum & MC 80 D



Brass



Stainless steel




| Schluter®-DECO | | | | |
|-------------------------------|-------------------------------------------|--------------------|-----------------------------------|---------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Stainless steel 304 (1.4301 = V2A) (E) | Solid brass (M) | Chrome-plated solid brass (MC) | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 8 - 5/16 | E 80 D | - | - | AE 80 D |
| 9 - 11/32 | E 90 D | M 90 D | MC 90 D | - |
| 10 - 3/8 | E 100 D | - | - | AE 100 D |
| 11 - 7/16 | E 110 D | M 110 D | MC 110 D | - |
| 12.5 - 1/2 | E 125 D | M 125 D | MC 125 D | AE 125 D |
| 14 - 17/32 | E 140 D | - | - | - |
| 16 - 5/8 | E 160 D | - | - | - |
| 18.5 - 23/32 | E 185 D | - | - | - |
| 21 - 13/16 | E 210 D | - | - | - |
| 25 - 1 | E 250 D | - | - | - |
| 30 - 1-3/16 | E 300 D | - | - | - |


Note: Only the brass and aluminum DECO are available in radius.
R = Radius



Aluminum, Brass



Stainless steel



| Schluter®-RENO-T | | | | |
|-------------------------------|-------------------------------------------|----------------------------------------------------|--------------------|---------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Stainless steel 304 (1.4301 = V2A) (E) | Brushed stainless steel 304 (1.4301 = V2A) (EB) | Solid brass (M) | Satin anodized aluminum (AE) |
| W = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 14 - 17/32 | T 9/14 E | T 9/14 EB | T 9/14 M | T 9/14 AE |
| 25 - 1 | T 9/25 E | T 9/25 EB | T 9/25 M | T 9/25 AE |


| Length = 2.5 m - 8' 2-1/2" | Satin nickel anodized aluminum (AT) | Satin copper anodized aluminum (AK) | Satin brass anodized aluminum (AM) |
|-------------------------------|----------------------------------------|----------------------------------------|---------------------------------------|
| W = mm - in. | Item No. | Item No. | Item No. |
| 14 - 17/32 | T 9/14 AT | T 9/14 AK | T 9/14 AM |
| 25 - 1 | T 9/25 AT | T 9/25 AK | T 9/25 AM |




Aluminum (1/4" - 6 mm)



Aluminum
5/16" - 3/8" (8 - 10 mm)



Aluminum
1/2" (12.5 mm)



Stainless steel, Brass

| Schluter®-RENO-TK | | | | |
|-------------------------------|-------------------------------------------|----------------------------------------------------|--------------------|---------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Stainless steel 304 (1.4301 = V2A) (E) | Brushed stainless steel 304 (1.4301 = V2A) (EB) | Solid brass (M) | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 6 - 1/4 | - | - | - | AETK 60 |
| 8 - 5/16 | ETK 80 | EBTK 80 | MTK 80 | AETK 80 |
| 10 - 3/8 | ETK 100 | EBTK 100 | MTK 100 | AETK 100 |
| 11 - 7/16 | ETK 110 | EBTK 110 | - | - |
| 12.5 - 1/2 | ETK 125 | EBTK 125 | MTK 125 | AETK 125 |

| Length = 2.5 m - 8' 2-1/2" | Bright chrome anod. alu. (ACB) | Satin nickel anod. alu. (AT) | Brushed nickel anod. alu. (ATGB) | Brushed antique bronze anod. alu. (ABGB) |
|-------------------------------|-----------------------------------|---------------------------------|-------------------------------------|---------------------------------------------|
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 6 - 1/4 | ATK 60 ACB | ATK 60 AT | - | - |
| 8 - 5/16 | ATK 80 ACB | ATK 80 AT | ATK 80 ATGB | ATK 80 ABGB |
| 10 - 3/8 | ATK 100 ACB | ATK 100 AT | ATK 100 ATGB | ATK 100 ABGB |
| 12.5 - 1/2 | ATK 125 ACB | ATK 125 AT | ATK 125 ATGB | ATK 125 ABGB |






Diagram Values




| H = mm - in. | B = mm - in. | |
|--------------|--------------|-----------------------|
| | Aluminum | Stainless steel/Brass |
| 6 - 1/4 | 7.5 - 19/64 | - |
| 8 - 5/16 | 8.5 - 21/64 | 7 - 9/32 |
| 10 - 3/8 | 8.5 - 21/64 | 11 - 7/16 |
| 11 - 7/16 | - | 13.5 - 17/32 |
| 12.5 - 1/2 | 15.5 - 39/64 | 16.5 - 21/32 |




Aluminum
1/8" (3.5 mm)




5/16" - 3/8" (8 - 10 mm)



1/2" - 3/4" (12.5 - 20 mm)



Stainless steel, Brass



Schluter®-RENO-U

| Length = 2.5 m - 8' 2-1/2" | Stainless steel 304 (1.4301 = V2A) (E) | Brushed stainless steel 304 (1.4301 = V2A) (EB) | Solid brass* (M) | Satin anodized aluminum (AE) |
|-------------------------------|-------------------------------------------|----------------------------------------------------|---------------------|---------------------------------|
| H = mm - in. | Item No. | Item No. | Item No. | Item No. |
| 3.5 - 1/8 | - | - | - | AEU 35 |
| 8 - 5/16 | EU 80 | EBU 80 | MU 80 | AEU 80 |
| 10 - 3/8 | EU 100 | EBU 100 | MU 100 | AEU 100 |
| 11 - 7/16 | EU 110 | EBU 110 | - | - |
| 12.5 - 1/2 | EU 125 | EBU 125 | MU 125 | AEU 125 |
| 15 - 9/16 | EU 150 | EBU 150 | MU 150 | AEU 150 |
| 17.5 - 11/16 | EU 175 | EBU 175 | - | AEU 175 |
| 20 - 3/4 | EU 200 | EBU 200 | - | - |


| Length = 2.5 m - 8' 2-1/2" | Bright chrome anod. alu. (ACB) | Satin nickel anod. alu. (AT) | Brushed nickel anod. alu. (ATGB) |
|-------------------------------|-----------------------------------|---------------------------------|-------------------------------------|
| H = mm - in. | Item No. | Item No. | Item No. |
| 8 - 5/16 | AU 80 ACB | AU 80 AT | AU 80 ATGB |
| 10 - 3/8 | AU 100 ACB | AU 100 AT | AU 100 ATGB |
| 12.5 - 1/2 | AU 125 ACB | AU 125 AT | AU 125 ATGB |

| Length = 2.5 m - 8' 2-1/2" | Brushed antique bronze anod. alu. (ABGB) | Satin brass anod. alu. (AM) |
|-------------------------------|---------------------------------------------|--------------------------------|
| H = mm - in. | Item No. | Item No. |
| 8 - 5/16 | AU 80 ABGB | AU 80 AM |
| 10 - 3/8 | AU 100 ABGB | AU 100 AM |
| 12.5 - 1/2 | AU 125 ABGB | AU 125 AM |


ADA-Compliant

Note: When leading edge abuts lower surface covering, sizes 3/4" (20 mm) and 11/16" (17.5 mm) are not ADA-compliant. When leading edge rests on top of lower surface covering, sizes 3/4" (20 mm), 9/16" (15 mm), and 11/16" (17.5 mm) are not ADA-compliant.


Diagram Values





| H = mm - in. | B = mm - in. | |
|--------------|---------------|-----------------------|
| | Aluminum | Stainless steel/Brass |
| 3.5 - 1/8 | 9 - 23/64 | - |
| 8 - 5/16 | 12.5 - 31/64 | 13 - 33/64 |
| 10 - 3/8 | 16.5 - 21/32 | 17.5 - 11/16 |
| 11 - 7/16 | - | 19.5 - 49/64 |
| 12.5 - 1/2 | 22 - 55/64 | 23 - 29/32 |
| 15 - 9/16 | 27.5 - 1-5/64 | 28 - 1-7/64 |
| 17.5 - 11/16 | 27 - 1-1/16 | 33.5 - 1-5/16 |
| 20 - 3/4 | - | 40 - 1-37/64 |



| Schluter®-RENO-RAMP | |
|-------------------------------|------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. |
| B = 50 mm - 2" | |
| 6 - 1/4 | AERP 60 B50 |
| B = 64 mm - 2-1/2" | |
| 10 - 3/8 | AERP 100 B65 |
| 12.5 - 1/2 | AERP 125 B65 |
| B = 89 mm - 3-1/2" | |
| 12.5 - 1/2 | AERP 125 B90 |
| 15 - 9/16 | AERP 150 B90 |
| 20 - 3/4 | AERP 200 B90 |


 **ADA-Compliant**
Note: RENO-RAMP sizes 3/4" - 20 mm and 9/16" - 15 mm are not ADA-compliant.

| Diagram Values | |
|------------------------------------------------------------------------------------|---------------------|
|  | |
| H = mm - in. | B = mm - in. |
| 6 - 1/4 | 50 - 2 |
| 10 - 3/8 | 64 - 2-1/2 |
| 12.5 - 1/2 | 64 - 2-1/2 |
| 12.5 - 1/2 | 89 - 3-1/2 |
| 15 - 9/16 | 89 - 3-1/2 |
| 20 - 3/4 | 89 - 3-1/2 |




B = 64 mm - 2-1/2"


| Schluter®-RENO-RAMP-K | |
|-------------------------------|------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. |
| B = 64 mm - 2-1/2" | |
| 12.5 - 1/2 | AERPK 125 B65 |



| Schluter®-RENO-V | |
|-------------------------------|-------------------------------------|
| Length = 2.5 m - 8' 2-1/2" | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. |
| B = 20 mm - 3/4" | |
| 8 - 5/16 | AEVT 80 B20 |
| 10 - 3/8 | AEVT 100 B20 |
| 12.5 - 1/2 | AEVT 125 B20 |
| 15 - 9/16 | AEVT 150 B20 |
| 17.5 - 11/16 | AEVT 175 B20 |
| 20 - 3/4 | AEVT 200 B20 |
| B = 30 mm - 1-3/16" | |
| 8 - 5/16 | AEVT 80 B30 |
| 10 - 3/8 | AEVT 100 B30 |
| 12.5 - 1/2 | AEVT 125 B30 |
| 15 - 9/16 | AEVT 150 B30 |
| 17.5 - 11/16 | AEVT 175 B30 |
| 20 - 3/4 | AEVT 200 B30 |
| B = 40 mm - 1-9/16" | |
| 8 - 5/16 | AEVT 80 B40 |
| 10 - 3/8 | AEVT 100 B40 |
| 12.5 - 1/2 | AEVT 125 B40 |
| 15 - 9/16 | AEVT 150 B40 |
| 17.5 - 11/16 | AEVT 175 B40 |
| 20 - 3/4 | AEVT 200 B40 |



| Schluter®-RENO-VT | |
|-------------------------------|-------------------------------------|
| Support profile | |
| Length = 2.5 m - 8' 2-1/2" | Satin anodized aluminum (AE) |
| H = mm - in. | Item No. |
| 8 - 5/16 | AEVT 80 |
| 10 - 3/8 | AEVT 100 |
| 12.5 - 1/2 | AEVT 125 |
| 15 - 9/16 | AEVT 150 |
| 17.5 - 11/16 | AEVT 175 |
| 20 - 3/4 | AEVT 200 |



| Schluter®-RENO-VB | |
|--------------------------------|-------------------------------------|
| Variable transition arm | |
| Length = 2.5 m - 8' 2-1/2" | Satin anodized aluminum (AE) |
| B = mm - in. | Item No. |
| 20 - 3/4 | AEVB 20 |
| 30 - 1-3/16 | AEVB 30 |
| 40 - 1-9/16 | AEVB 40 |

Schluter® Systems Floor Profiles 5-Year Limited Warranty

LIMITED WARRANTY COVERAGE: Subject to the conditions and limitations as stated in this **Schluter® Systems Floor Profiles 5-Year Limited Warranty** (the “**Limited Warranty**”), Schluter Systems warrants that its Schluter®-SCHIENE, Schluter®-RENO-TK, Schluter®-DECO, Schluter®-RENO-U, Schluter®-RENO-T, Schluter®-RENO-RAMP, Schluter®-RENO-RAMP-K, and Schluter®-RENO-V (collectively, the “**Products**”) will be free from manufacturing defects and will perform as described in the Schluter Systems Floor Profiles Technical Data Sheet (collectively, the “**Written Materials**”) for a period of five (5) years from the date of purchase when installed and used in accordance with the terms and conditions of the Written Materials and industry standard guidelines that are not in conflict with the Written Materials in effect at the time of installation.

For the purposes of this Limited Warranty, “**Owner**” is defined as the original end user of the property in which the Products are installed; and “**Tile Assembly**” is defined to include the Products, non-reusable flooring surfaces, and applicable setting and grouting materials.

This Limited Warranty is only applicable to installations in the United States of America and Canada. Schluter Systems is not responsible or liable under any circumstances for determining the suitability of the Products for the Owner’s intended purpose. It is the responsibility of the Owner to consult with an experienced and professional installer to ensure the suitability of the Products, subfloor/substrate and all building materials in the installation and that the Written Materials are followed properly.

RESOLUTION: If the Products are installed and used in accordance with the terms and conditions as described hereinabove and such Products are proven defective within the applicable warranty term, the Owner’s exclusive remedy and the sole obligation of Schluter Systems, at its election, shall be to (a) reinstall or replace the failed portion of the Tile Assembly or (b) pay an amount not to exceed the original square foot cost of the installation of the Tile Assembly verified to be defective. Due to conditions beyond the control of Schluter Systems (e.g., color and shade availability, discontinuation, normal wear and tear), Schluter Systems cannot guarantee or warrant an exact match to the specific tile, stone, or other flooring materials used in the original installation. In such event, substantially similar materials may be substituted.

EXCLUSIONS FROM COVERAGE: This Limited Warranty excludes and in no event shall Schluter Systems have any liability for any indirect, special, incidental, punitive, exemplary, or consequential damages, including lost profits, arising out of or otherwise connected to the failure of the Products or Tile Assembly, regardless of any strict liability or active or passive negligence of Schluter Systems, and regardless of legal theory, whether in contract, tort, extra-contractual or other. This Limited Warranty further excludes any loss or damage arising out of or otherwise connected to: acts of war, terrorism, fire, explosion, natural disaster, acts of God, any failure to comply with the Written Materials, inadequate subfloor/substrate, improper preparation or other failure of subfloor/substrate, faulty or negligent penetration of the Products or subfloor/substrate, intentional acts of destruction, structural failure, misuse of or failure to maintain the Products, normal wear and tear, scratches, dents, corrosion or discoloration (whether caused by excessive heat, chemical cleaning products, abrasive agents or otherwise), efflorescence and shading which are a natural occurrence with cementitious materials and are not considered a defective condition for the purposes of this Limited Warranty, variations of texture, color or shade from those on product samples, packaging materials or other marketing materials, or other causes unrelated to the Products (e.g. floor covering failure, excess point loading, overvoltage). This Limited Warranty excludes exterior applications and applications utilizing glass tile or other non-approved floor coverings, unless specifically approved in writing on a case by case basis by the Schluter Systems Technical Services Director.

This Limited Warranty is conditioned and will be considered null and void and Schluter Systems will have the right to refuse any claims if: (a) the Products have been improperly stored or installed, or (b) the Products are subject to abusive or abnormal use, lack of maintenance, or used in a manner other than that for which the Products were designed or in any way contrary to the Written Materials.

DISCLAIMER: There are no warranties beyond this expressed warranty as stated herein. To the extent permitted by law, all other warranties, representations or conditions, expressed or implied, are hereby disclaimed and excluded, including but not limited to the implied warranties of **MERCHANTABILITY** or **FITNESS FOR A PARTICULAR PURPOSE** (as limited to such purposes as described in the Written Materials) or arising from a course of dealing, usage of trade or otherwise by law. **ANY IMPLIED WARRANTIES ARISING BY OPERATION OF LAW ARE LIMITED IN DURATION TO THE TERM OF THIS LIMITED WARRANTY. NO REPRESENTATION, PROMISE, AFFIRMATION OR STATEMENT BY ANY EMPLOYEE OR AGENT OF SCHLUTER SYSTEMS WILL BE ENFORCEABLE AGAINST SCHLUTER SYSTEMS UNLESS IT IS SPECIFICALLY INCLUDED IN THIS LIMITED WARRANTY OR AUTHORIZED IN WRITING BY THE SCHLUTER SYSTEMS TECHNICAL SERVICES DIRECTOR.** This Limited Warranty is given in lieu of any other warranty, whether expressed or implied. The remedies contained herein are the only remedies available for breach of this Limited Warranty. This Limited Warranty extends only to the Owner and is not transferable or assignable unless authorized by written agreement and signed by the Schluter Systems Technical Services Director or otherwise prohibited by specific state or provincial law. This Limited Warranty gives you specific legal rights; some states and provinces do not allow disclaimers or other restrictions of implied warranties; some of the above disclaimers may not apply to you. **No changes or modifications of any terms or conditions of this Limited Warranty are permitted unless duly authorized in writing by the Schluter Systems Technical Services Director.** This Limited Warranty shall supersede and replace any and all prior oral or written warranties, agreements, or other representations made by or on behalf of Schluter Systems relative to the Products or the application of the Products and shall apply to any installation occurring on or after April 8, 2019. If the Products are used in conjunction with other Schluter products, a different Schluter warranty may apply. For the most current information and materials regarding Schluter Systems warranties and programs, please visit https://www.schluter.com/schluter-us/en_US/downloadfiles.

MAKING A CLAIM: To make a claim under this Limited Warranty, the Owner must provide Schluter Systems² with written notice within thirty (30) days of any alleged defect in the Products covered by this Limited Warranty, together with date and proof of purchase of such Products and/or all of its components and name and address of all installers and all invoices related to the original installation, failing which this Limited Warranty shall have no legal effect³. Schluter Systems reserves the right at its election and as a condition of this Limited Warranty to inspect the alleged failed and/or defective Products.

All U.S. Claims shall be sent to:

Schluter Systems L.P.
Attn: Warranty Claims Dept.
194 Pleasant Ridge Road
Plattsburgh, NY 12901-5841

All Canadian Claims shall be sent to:

Schluter Systems (Canada), Inc.
Attn: Warranty Claims Dept.
21100 chemin Ste-Marie
Ste-Anne-de-Bellevue, QC H9X 3Y8

¹ If there are any conflicting terms between any Written Materials, the most recently updated document shall be deemed to control.

² This Limited Warranty is limited to sales of the Products made in and intended for use in the United States and Canada. For the purposes of this Limited Warranty, Schluter Systems L.P. shall offer warranty coverage to Owners located in the United States, and Schluter Systems (Canada) Inc. shall offer warranty coverage to Owners located in Canada.

³ In the event that Owner fails to provide such required invoices relating to the original installation, Schluter Systems shall pay Owner an amount equal to the average, reasonable costs of a comparable installation. If the parties fail to agree on such amount, such dispute shall promptly, and in the first instance, be submitted: (a) if a U.S. claim, to arbitration in Clinton County, New York, in accordance with the rules of the American Arbitration Association, or (b) if a Canadian claim, in the Province of Quebec, Canada, in accordance with the ADRI Arbitration Rules. Any outcome of such arbitration proceeding shall be final and binding upon the parties hereto.



Schluter Systems L.P. • 194 Pleasant Ridge Road, Plattsburgh, NY 12901-5841 • Tel.: 800-472-4588 • Fax: 800-477-9783
Schluter Systems (Canada) Inc. • 21100 chemin Ste-Marie, Ste-Anne-de-Bellevue, QC H9X 3Y8 • Tel.: 800-667-8746 • Fax: 877-667-2410

www.schluter.com

This technical data sheet is subject to change without notice. Please visit www.schluter.com for the latest version.